



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 1 058 471 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:  
06.12.2000 Bulletin 2000/49

(51) Int Cl.7: H04Q 7/38

(21) Application number: 00304568.9

(22) Date of filing: 30.05.2000

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• Parmar, Gina, Telecom Modus Limited  
Surrey KT22 7SA (GB)  
• Patterson, Robert, Telecom Modus Limited  
Surrey KT22 7SA (GB)

(30) Priority: 28.05.1999 GB 9912604

(74) Representative: Moir, Michael Christopher et al  
Mathys & Squire  
100 Gray's Inn Road  
London WC1X 8AL (GB)

(71) Applicant: NEC CORPORATION  
Tokyo (JP)

(54) Mobile telecommunications system

(57) A method of processing a handover request from a base station controller (BSC) of a GSM (Global System for Mobile communication) -type network. The method comprises the steps of passing a handover request with GSM-type parameters from a base station controller (BSC) through a Master Switching Center

(MSC) of the GSM-type network to a UMTS core network (CN) and to a Radio Network Controller (RNC) of the UMTS (Universal Mobile Telecommunications System) network, translating the GSM-type parameters to UTRAN parameters in the Radio Network Controller (RNC), and allocating UTRAN resources in response to the translated parameters.

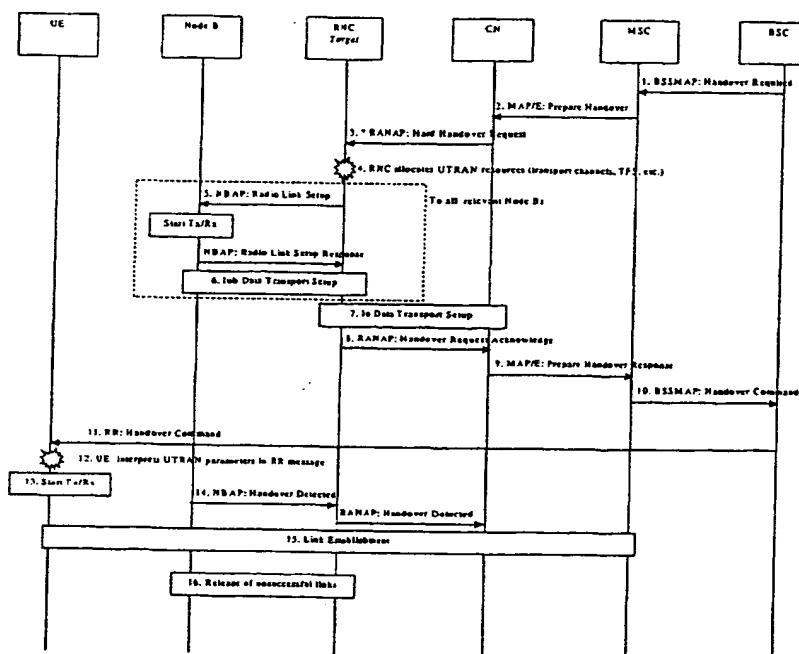


Figure 1

EP 1 058 471 A2

## Description

### Background of the Invention

**[0001]** The present invention relates to a mobile telecommunication system and is particularly concerned with the handover of calls between two types of communication system, particularly handover between a GSM and a UMTS network.

**[0002]** It has been generally proposed that it would be desirable to provide handover between a GSM network and a UMTS network. However, this is not a straightforward task to accomplish and there are a number of problems to implement before this can be successfully achieved; the present invention is concerned with these problems. It is, however, more generally applicable to interoperability between networks using different protocols; in such a case, the terms used herein are to be construed as applying to the relevant equivalent components of the networks to which the invention is applied. Although aspects of the invention provide independent solutions to various aspects of the problems concerned with GSM to UMTS handover, all are concerned with this common problem and in particular are concerned with a particular novel solution in which an RNC of the UMTS network controls handover to a large extent.

**[0003]** The invention is described in the context of GSM and UMTS networks for ease of understanding but is applicable to handover between other networks with similar characteristics. Accordingly, all references to GSM and UMTS and all terms of art used herein are to be construed as encompassing equivalent features of other networks. In particular, the present Japanese PDC network is of similar architecture to GSM and the term GSM (or GSM-type) as used in the specification and claims is intended to encompass such a network. Similarly, the term UMTS (and related terms) is intended to encompass a UMTS system in accordance with present standards and proposals and any derivatives or equivalents thereof.

### Summary of the Invention

**[0004]** In a first aspect, the invention provides a method of processing a handover request from a base station controller (BSC) of a GSM network, the method comprising passing a handover request with GSM parameters from a base station controller (BSC) through a Master Switching Centre (MSC) of the GSM network to a UMTS core network (CN) and to a Radio Network Controller (RNC) of the UMTS network; in the radio network controller, translating the GSM parameters to UTRAN parameters; and allocating UTRAN resources in response to the translated parameters. Thus, rather than translating the GSM parameters on entry to the UMTS network, the GSM parameters pass transparently through at least a portion of the UMTS network to the

RNC. The parameters may include one or more of data rate, call type (voice, data, fax, other, e.g. video, IP), Quality of Service etc. This reduces processing load elsewhere in the network and enables the RNC to allocate the optimum UTRAN resources for the call.

**[0005]** Preferably, the RNC is arranged to switch directly from a GSM connection to a soft handover UMTS mode. This is advantageous compared to simply establishing an individual connection from the User Equipment (UE) to a single UMTS access node. This preferred features may be provided independently in a second aspect in which the invention provides a method of switching from a GSM network to a UMTS network characterised by switching directly from a mode in which User Equipment (UE) is in communication with a GSM base station to a UMTS diversity mode in which the User Equipment is in communication with a plurality of UMTS access nodes, preferably comprising configuring the UTRAN so that a plurality of access nodes are prepared to communicate with the UE and/or preferably supplying a list of potential access nodes to the UE.

**[0006]** Preferably, the Radio Network Controller (RNC) is arranged, following translation of the GSM format handover request firstly to perform radio link setup and then, following a response from the radio link, to perform data transport setup for communication between the Radio Network Controller and the Core Network. This allows communication with the Core Network to be established following successful radio setup rather than independently, thus avoiding unnecessary use of CN to RNC (Iu interface) resources if radio link setup is not possible. This preferable feature may be provided independently in a third aspect in which the invention provides a method of establishing UMTS communication with User Equipment following receipt by a Radio Network Controller of a GSM handover request, the method comprising, in the Radio Network Controller, setting up a radio link to a Node B and, following acknowledgement of the radio link setup, in the Radio Network Controller, setting up data transport between the Radio Network Controller and the Core Network.

**[0007]** Preferably, the Radio Network Controller is arranged (preferably following radio link setup) to pass a handover message containing UTRAN parameters through the GSM network (for example as a message), preferably through the Core Network to the GSM Master Switching Centre and preferably at least through the Base Station Controller of the GSM network, to the User Equipment; the method further comprising interpreting the UTRAN parameters in the User Equipment and, in response to the parameters, initiating communication between the User Equipment and the UMTS network.

**[0008]** This may be provided independently in a fourth aspect in which the invention provides a method of establishing UMTS communication between User Equipment and a UMTS network, wherein the User Equipment is in communication with a GSM network, the method comprising forwarding UTRAN parameter infor-

mation, preferably comprising a list of potential UMTS Access Nodes via the GSM network, preferably from a Radio Network Controller of the UMTS network, to the User Equipment and, in the User Equipment, interpreting the UTRAN parameter information and initiating communication with the UMTS network.

[0009] Thus, in contrast to the initial step, where GSM information tunnels into the UMTS network and is interpreted in the RNC, the UTRAN information tunnels through the GSM network without interpretation and is interpreted by the UE. This means that the GSM network need not include intelligence to process the information, simplifying interconnection with existing GSM networks.

[0010] Following initiation of communication, preferably the UE is arranged to establish a link through the RNC of the UMTS network to the MSC of the GSM network (where the GSM call originated). This then completes establishing a link from the MSC to the UE via the UMTS network.

[0011] Preferably, potential links supplied in a list to the UE on which satisfactory communication is not possible are deleted from the list of available links; this step may be provided independently in a method of performing soft handover from a GSM network to a UMTS network comprising supplying a list of potential UMTS access nodes to User Equipment; establishing communication between the UE and at least one UMTS access node; and deleting potential nodes with which satisfactory communication is not possible from said list.

[0012] Preferably, at least during handover, the User Equipment (UE) is arranged to communicate over both the GSM network and the UMTS network simultaneously or quasi-simultaneously. This feature may be provided independently in a fifth aspect in which the invention provides a method of communicating between User Equipment and GSM and UMTS networks comprising communicating information simultaneously or quasi-simultaneously via both networks during handover from one network to the other.

[0013] All of the above aspects may be provided independently, but are advantageously combined in a system. Thus, the invention may provide a method of handing over a GSM call to a UMTS network comprising: passing a handover request from the GSM network (preferably from a BSC, preferably containing GSM call parameters) to a RNC of the UMTS network; interpreting the request in the RNC and initiating call setup (preferably performing radio link setup and preferably thereafter, in response to a successful setup, performing data link to core network setup); forwarding handover information containing UTRAN parameters (preferably including a list of potential access nodes) to UE (preferably passing the UTRAN information transparently through the GSM network, for example as a message, to be interpreted by the UE); in the UE, setting up a UMTS call based on the UTRAN parameters.

[0014] The invention extends to a radio network, or combination of networks, radio network components,

particularly RNCs and UEs all adapted to implement any of the above method aspects.

#### Brief Description of the Drawing

[0015] An embodiment of the invention will now be described, with reference to the accompanying drawing in which Figure 1 depicts the sequence of events between GSM to UMTS handover via a MAP/E interface. This will also be applicable via the IWU.

#### Description of the Preferred Embodiment

##### [0016]

1. The BSC sends **Handover Required** message to the GSM MSC. This includes the GSM information elements {service information rate, service type, etc.} and the UMTS cell/Node-B information on which good radio quality is achievable.

2. The GSM MSC sends MAP/E message **Prepare Handover** to the UMTS CN forwarding the UMTS cell-ids transparently.

3. The CN sends RANAP message **Handover Request** to the Target RNC. This message will contain information elements indicating from which network type this handover is taking place e.g. 'handover-type' = 'from GSM'. It will also contain information elements allowing transparent transfer of GSM Parameters to the RNC, e.g. GSM Bearer Capability, version number and other relevant parameters relating to the GSM call. Additionally, the relevant UMTS cell/Node-B information provided by the MS/UE is also transferred transparently to the RNC.

4. The RNC maps GSM appropriate call parameters to the relevant UMTS logical channel, transport channel and allocates radio resource parameters as appropriate (e.g. DL channelization code, UL spreading factor, UL scrambling code, Radio Frequency, Radio Link ID, Link Reference, S-RNTI, Transport Format Sets, Transport Format Combination Set, Initial DL Power). This function can only be done at this stage, since only the RNC knows the status of the radio resources.

5. Since dedicated transport channels are selected, **the GSM call can go into immediate soft-handover.**

i) The RNC sends NBAP message **Radio Link Setup** to all relevant Node Bs.

ii) All relevant Node Bs start transmission/reception.

iii) All relevant Node Bs send NBAP message **Radio Link Setup Response** to the RNC.

6. The RNC sets up Iub transport bearer to all relevant Node Bs. The RNC is in a condition to set up the Transport Bearer across Iub since it knows if the UTRAN resources have been set up successfully.

7. The RNC sets up Iu transport bearer. The RNC is in a condition to set up the Transport Bearer across Iu since it knows if the UTRAN resources have been set up successfully.

8. The RNC sends **Handover Request Acknowledge** passing the appropriate UMTS parameters to the CN (e.g. DL channelization code, UL Spreading Factor, UL Scrambling Code, etc.) which are destined for the UE allowing the successful handover of the UE to UMTS.

9. The CN sends **Prepare Handover Response** to the GSM MSC (forwarding the UMTS parameters).

10. The GSM MSC sends **Handover Command** to the BSC (forwarding the UMTS parameters).

11. BSC sends the RR message **Handover Command** to the UE. This contains the necessary UMTS parameters.

12. The UE interprets the UMTS parameters within the RR message and is able to switch the call from a GSM call into a UMTS call with multiple or single diversity branches as indicated in the UMTS parameters. At this stage, the mobile unit is receiving information from the GSM network using its GSM capabilities and uses this information to switch communication to the UMTS network or simultaneously communicate with the UMTS network and GSM network using its UMTS and GSM capabilities.

13. The UE starts Tx/Rx.

14. On detection of synchronisation, the Node B sends NBAP message **Handover Detect** to the RNC.

15. If at least one of the Radio links has been successfully set up, then the RNC is able to establish the RLC link for the DTCH and the RRC for the DCCH to the UE. The RNC is then able to signal to the CN and onwards to the MSC that the handover is complete. The MSC is able to switch the call through on the new UTRAN leg.

16. In the case of having allocated multiple radio links on the DL and if UL synchronisation has not been detected, then the appropriate signalling may take place between Node B and RNC to release the unused radio resources.

[0017] It will be appreciated that the invention can be applied to other network configurations. To assist in appreciating how the invention may be extended, a glossary of terms used in the art pertaining to UMTS systems is provided; any of the terms of art may be replaced by functionally equivalent components in a non-UMTS system. The following documents are incorporated herein by reference:-

[1]Draft-ETR/SMG-50102, "Special Mobile Group (SMG) Vocabulary for the Universal Mobile Telecommunications System".

[2]ETSI DTR/SMG-0225xxU, "Universal Mobile Telecommunications System (UMTS); Vocabulary for the UTRAN", UMTS 25.XX Version 0.1.0.

#### Terms and definitions

##### **Active Set**

[0018] Set of radio links simultaneously involved in a specific communication service between a UE and a UTRAN.

##### **Cell**

[0019] A cell is a geographical area that can be identified by a UE from a (cell) identification that is broadcast from one *UTRAN Access Point*.

##### **Coded Composite Transport Channel (CCTrCH)**

[0020] A data stream resulting from encoding and multiplexing of one or several *transport channels*.

[0021] The data stream of the CCTrCH is fed to a data splitter unit that splits the CCTrCH's data stream onto one or several *Physical Channel Data Streams*.

##### **Contention Resolution**

[0022] A functionality or procedure to solve the collision of identities on the initial random access messages from two (or more) UEs.

##### **Forward Handover**

[0023] A type of handover initiated by the UE. The UE sends the request for establishment of a new radio link in the new cell, i.e. it does not use the current radio link for performing handover but a radio link of the new cell.

##### **Gateway UE<sub>R</sub>/Seed**

[0024] A ODMA relay node that also communicates with the UTRAN using either TDD or FDD mode.

**Handover**

[0025] Handover is a family of procedures that adds or removes one or several radio links between one UE and UTRAN when a RRC connection exists and the position of the UE is known on cell level in the UTRAN.

**Hard Handover**

[0026] Hard handover is a category of handover procedures where all the old radio links in the UE are abandoned before the new radio links are established.

**Logical Channel**

[0027] A logical channel is an information stream dedicated to the transfer of a specific type of information over the radio interface.

**ODMA Relay Node**

[0028] A relay device, such as a UER or Seed, that is capable of relaying using the ODMA protocol.

**Physical Channel**

[0029] In FDD mode, a physical channel is defined by code, frequency and, in the uplink, relative phase ( $I/Q$ ). In TDD mode, a physical channel is defined by code, frequency, and timeslot.

**Physical channel data stream**

[0030] In the uplink, a data stream that is transmitted on one *physical channel*. In the downlink, a data stream that is transmitted on one *physical channel* in each cell of the *active set*.

**Radio access bearer**

[0031] The service that the access stratum provides to the non-access stratum for transfer of user data between UE and CN.

**Radio frame**

[0032] A radio frame is a numbered time interval of 10 ms duration used for data transmission on the radio physical channel. A radio frame is divided into 16 time slots of 0.625 ms duration. The unit of data that is mapped to a radio frame (10 ms time interval) may also be referred to as radio frame.

**Radio link**

[0033] The set of (radio) *physical channels* comprised in a transmission path between a UE to one *UTRAN access point*.

**Radio link addition**

[0034] The procedure where a new *radio link* is added to the *active set*.

**Radio link removal**

[0035] The procedure where a *radio link* is removed from the *active set*.

**Radio Network Temporary Identifier (RNTI)**

[0036] A Radio Network Temporary Identifier is an identifier for a UE when an *RRC connection* exists. It is e.g. used by the MAC protocol on common *Transport Channels* (RACH, FACH, PCH).

**Relay**

[0037] A device capable of receiving and transmitting information for another user.

**Relaying**

[0038] The process of receiving and transmitting information for another user, such as carried out by a  $UE_R$ .

**Relaylink**

[0039] Relaylink is the communications line between two ODMA relay nodes.

**Root Relay**

[0040] ODMA relay node where communications are either sourced or sunk.

**RRC connection**

[0041] A point-to-point bi-directional connection between RRC peer entities on the UE and the UTRAN sides, respectively. An UE has either zero or one RRC connection.

**Seed**

[0042] A ODMA relay node which is deployed by a network operator and is generally fixed, constantly powered, and has no display/keypad.

**Signalling connection**

[0043] An acknowledged-mode link between the user equipment and the core network to transfer higher layer information between peer entities in the non-access stratum.

## Signalling link

[0044] Provides an acknowledged-mode link layer to transfer the UE-UTRAN signalling messages as well as UE - Core Network signalling messages (using the signalling connection).

## Soft Handover

[0045] Soft handover is a category of handover procedures where the radio links are added and abandoned in such manner that the UE always keeps at least one radio link to the UTRAN.

## Transmission Time Interval

[0046] Transmission Time Interval is defined as the inter-arrival time of *Transport Block Sets*, i.e. the time it should take to transmit a *Transport Block Set*. It is always a multiple of 10ms (the length of one *Radio Frame*).

## Transport Block

[0047] Transport Block is defined as the basic unit passed down to L1 from MAC, for L1 processing. An equivalent term for Transport Block is "MAC PDU".

## Transport Block Set

[0048] Transport Block Set is defined as a set of *Transport Blocks* which is passed to L1 from MAC at the same time instance using the same *transport channel*. An equivalent term for Transport Block Set is "MAC PDU Set".

## Transport Block Set Size

[0049] Transport Block Set Size is defined as the number of bits in a *Transport Block Set*.

## Transport Block Size

[0050] Transport Block Size is defined as the size (number of bits) of a *Transport Block*.

## Transport channel

[0051] The channels offered by the physical layer to Layer 2 for data transport between peer L1 entities are denoted as Transport Channels.

[0052] Different types of transport channels are defined by how and with which characteristics data is transferred on the physical layer, e.g. whether using dedicated or common physical channels are employed.

## Transport Format

[0053] A Transport Format is defined as a format offered by L1 to MAC for the delivery of a *Transport Block Set* during a *Transmission Time Interval* on a *Transport Channel*. The Transport Format constitutes of two parts - one dynamic part and one semi-static part.

## Transport Format Combination

[0054] A Transport Format Combination is defined as the combination of currently valid *Transport Formats* on all *Transport Channels* of a UE, i.e. containing one *Transport Format* from each *Transport Channel*.

## Transport Format Combination Set

[0055] A Transport Format Combination Set is defined as a set of *Transport Format Combinations* to be used by a UE.

## Transport Format Combination Indicator (TFCI)

[0056] A Transport Format Combination Indicator is a representation of the current *Transport Format Combination*.

## Transport Format Indicator (TFI)

[0057] A label for a specific *Transport Format* within a *Transport Format Set*.

## Transport Format Set

[0058] A Transport Format Set is defined as the set of *Transport Formats* associated to a *Transport Channel*.

## URA updating

[0059] URA updating is a family of procedures that updates the UTRAN registration area of a UE when a RRC connection exists and the position of the UE is known on URA level in the UTRAN.

## User Equipment/Relay enabled (UE<sub>R</sub>)

[0060] A UE with ODMA relay operation enabled.

## UTRAN Registration Area (URA)

[0061] The UTRAN Registration Area is an area covered by a number of cells. The URA is only internally known in the UTRAN.

## UTRAN access point

[0062] A conceptual point within the UTRAN perform-

ing radio transmission and reception. A UTRAN access point is associated with one specific *cell*, i.e. there exists one UTRAN access point for each cell. It is the UTRAN-side end point of a *radio link*.

#### Abbreviations

#### **[0063]**

ARQ	Automatic Repeat Request
BCCH	Broadcast Control Channel
BCH	Broadcast Channel
BPSK	Binary Phase Shift Keying
BSS	Base Station System
BTS	Base Transceiver Station
C-	Control-
CC	Call Control
CCCH	Common Control Channel
CCH	Control Channel
CCTrCH	Coded Composite Transport Channel
CDMA	Code Division Multiple Access
CN	Core Network
CRC	Cyclic Redundancy Check
DC	Dedicated Control (SAP)
DCA	Dynamic Channel Allocation
DCCH	Dedicated Control Channel
DCH	Dedicated Channel
DHO	Diversity Handover
DL	Downlink
DRNC	Drift Radio Network Controller
DS-CDMA	Direct-Sequence Code Division Multiple Access
DSCH	Downlink Shared Channel
DTCH	Dedicated Traffic Channel
DTX	Discontinuous Transmission
FACH	Forward Link Access Channel
FAUSCH	Fast Uplink Signalling Channel
FCS	Frame Check Sequence
FDD	Frequency Division Duplex
GC	General Control (SAP)
HO	Handover
HHO	Hard Handover
ITU	International Telecommunication Union
kbps	kilo-bits per second
ksps	kilo-symbols per second
L1	Layer 1 (physical layer)
L2	Layer 2 (data link layer)
L3	Layer 3 (network layer)
LAC	Link Access Control
MAC	Medium Access Control
MM	Mobility Management
Mcps	Mega-chips per second
Nt	Notification (SAP)
OCCCH	ODMA Common Control Channel
ODCCH	ODMA Dedicated Control Channel
ODCH	ODMA Dedicated Channel
ODMA	Opportunity Driven Multiple Access
ORACH	ODMA Random Access Channel

ODTCH	ODMA Dedicated Traffic Channel
PCCH	Paging Control Channel
PCH	Paging Channel
PDU	Protocol Data Unit
5 PHY	Physical layer
PhyCH	Physical Channel
RACH	Random Access Channel
RLC	Radio Link Control
RNC	Radio Network Controller
10 RNS	Radio Network Subsystem
RNTI	Radio Network Temporary Identity
RRC	Radio Resource Control
SAP	Service Access Point
SCCH	Synchronization Control Channel
15 SCH	Synchronization Channel
SDU	Service Data Unit
SIR	Signal-to-Interference Ratio
SRNC	Serving Radio Network Controller
SRNS	Serving Radio Network Subsystem
20 TCH	Traffic Channel
TDD	Time Division Duplex
TFCI	Transport Format Combination Indicator
TFI	Transport Format Indicator
TN	Termination Node
25 TPC	Transmit Power Control
TRX	Transmitter/Receiver
U-	User-
UE	User Equipment
UE <sub>R</sub>	User Equipment with ODMA relay operation enabled
30 UL	Uplink
UMTS	Universal Mobile Telecommunications System
URA	UTRAN Registration Area
35 UTRA	UMTS Terrestrial Radio Access
UTRAN	UMTS Terrestrial Radio Access Network

**[0064]** Each feature disclosed in this specification (which term includes the claims) and/or shown in the drawings may be incorporated in the invention independently of other disclosed and/or illustrated features.

**[0065]** Statements in this specification of the "objects of the invention" relate to preferred embodiments of the invention, but not necessarily to all embodiments of the invention falling within the claims.

**[0066]** The description of the invention with reference to the drawings is by way of example only.

**[0067]** The text of the abstract filed herewith is repeated here as part of the specification.

**[0068]** A method of processing a handover request from a base station controller (BSC) of a GSM (Global System for Mobil communication) -type network. The method comprises the steps of passing a handover request with GSM-type parameters from a base station controller (BSC) through a Master Switching Center (MSC) of the GSM-type network to a UMTS core network (CN) and to a Radio Network Controller (RNC) of the UMTS (Universal Mobile Telecommunications Sys-

tem) network, translating the GSM-type parameters to UTRAN parameters in the Radio Network Controller (RNC), and allocating UTRAN resources in response to the translated parameters.

### Claims

1. A method of processing a handover request from a base station controller (BSC) of a GSM-type network, the method comprising passing a handover request with GSM-type parameters from a base station controller (BSC) through a Master Switching Centre (MSC) of the GSM-type network to a UMTS core network (CN) and to a Radio Network Controller (RNC) of the UMTS network; in the Radio Network Controller (RNC), translating the GSM-type parameters to UTRAN parameters; and allocating UTRAN resources in response to the translated parameters.
2. A method according to Claim 1, wherein the parameters include one or more of data rate, call type and Quality of Service.
3. A method according to Claim 1 or 2, wherein allocating UTRAN resources comprises, in the Radio Network Controller, setting up a radio link to a Node B and, following acknowledgement of the radio link setup, in the Radio Network Controller, setting up data transport between the Radio Network Controller and the Core Network.
4. A method of establishing UMTS communication with User Equipment following receipt by a Radio Network Controller of a GSM-type handover request, the method comprising, in the Radio Network Controller, setting up a radio link to a Node B and, following acknowledgement of the radio link setup, in the Radio Network Controller, setting up data transport between the Radio Network Controller and the Core Network.
5. A method according to any preceding claim wherein the Radio Network Controller is arranged, preferably following radio link setup, to pass a handover message containing UTRAN parameters through the GSM network to the User Equipment; the method further comprising interpreting the UTRAN parameters in the User Equipment and, in response to the parameters, initiating communication between the User Equipment and the UMTS network.
6. A method according to Claim 5, wherein the handover message is passed as a GSM-type message transparently through the Core Network to the GSM Master Switching Centre and through the Base Station Controller of the GSM-type network.
7. A method of establishing UMTS communication between User Equipment and a UMTS network, wherein the User Equipment is in communication with a GSM-type network, the method comprising forwarding UTRAN parameter information to the User Equipment via the GSM-type network and, in the User Equipment, interpreting the UTRAN parameter information and initiating communication with the UMTS network.
8. A method according to Claim 7, wherein the UTRAN parameter information is supplied by a Radio Network Controller of the UMTS network.
9. A method according to Claim 5, 6, 7 or 8, wherein the UTRAN parameter information comprises a list of potential UTRAN access points.
10. A method according to any of Claims 5 to 9 wherein the UE is arranged to establish a link through the RNC of the UMTS network to the MSC of the GSM-type network.
11. A method according to any of Claims 5 to 9 wherein potential links supplied in a list to the UE on which satisfactory communication is not possible are deleted from the list of available links.
12. A method of performing soft handover from a GSM-type network to a UMTS network comprising supplying a list of potential UTRAN access points to User Equipment; establishing communication between the UE and at least one UTRAN access point; and deleting from said list potential access points with which satisfactory communication is not possible.
13. A method of switching from a GSM-type network to a UMTS network characterised by switching directly from a mode in which User Equipment (UE) is in communication with a GSM-type base station to a UMTS diversity mode in which the User Equipment is in communication with a plurality of UMTS access nodes.
14. A method according to Claim 12 or 13 comprising configuring the UTRAN so that a plurality of access nodes are prepared to communicate with the UE.
15. A method according to Claim 12, 13 or 14 comprising supplying a list of potential access nodes to the UE.
16. A method of communicating between User Equipment and GSM-type and UMTS networks comprising communicating information simultaneously or quasi-simultaneously via both networks during handover from one network to the other.



17. A method of handing over a GSM-type call to a UMTS network comprising: passing a handover request from the GSM-type network, preferably from a BSC, preferably containing GSM-type call parameters, to a RNC of the UMTS network; interpreting the request in the RNC and initiating call setup, preferably performing radio link setup and preferably thereafter, in response to a successful setup, performing data link to Core Network setup; forwarding handover information containing UTRAN parameters, preferably including a list of potential access nodes, to User Equipment, preferably comprising passing the UTRAN information transparently through the GSM network; in the User Equipment, setting up a UMTS call based on the UTRAN parameters. 5 10 15
18. A Radio Network Controller of a UMTS network arranged to implement a method according to any of the preceding claims. 20
19. A Radio Network Controller of a UMTS network including means for translating GSM call parameters to UTRAN parameters to allocate UTRAN resources corresponding to the GSM call parameters to enable handover of a call from a GSM network to the UMTS network. 25
20. A Radio Network Controller of a UMTS network including means for performing radio link setup in response to a request from a GSM network to handover a call. 30
21. A Radio Network Controller of a UMTS network according to Claim 20 further comprising means for setting up communication with a Core Network following successful radio link setup. 35
22. A Radio Network Controller of a UMTS network, preferably according to Claim 19, 20 or 21, including means for sending UTRAN parameters to User Equipment (UE) via a GSM network to enable the UE to establish UMTS communication to transfer the call from the GSM network to the UMTS network. 40 45
23. A Radio Network Controller of a UMTS network according to Claim 22, wherein the parameters include a list of potential UMTS access nodes. 50
24. User Equipment for a UMTS network arranged to communicate over both a GSM network and said UMTS network and comprising means for receiving UTRAN parameters for setting up a UMTS call from the GSM network and means for initiating communication with the UMTS network based on said parameters to enable a GSM call to be handed over to the UMTS network. 55
25. A message or data packet in a GSM network containing UTRAN parameters for handing over a GSM call to a UMTS network addressed to User Equipment engaged in a GSM call and capable of switching to a UMTS call.

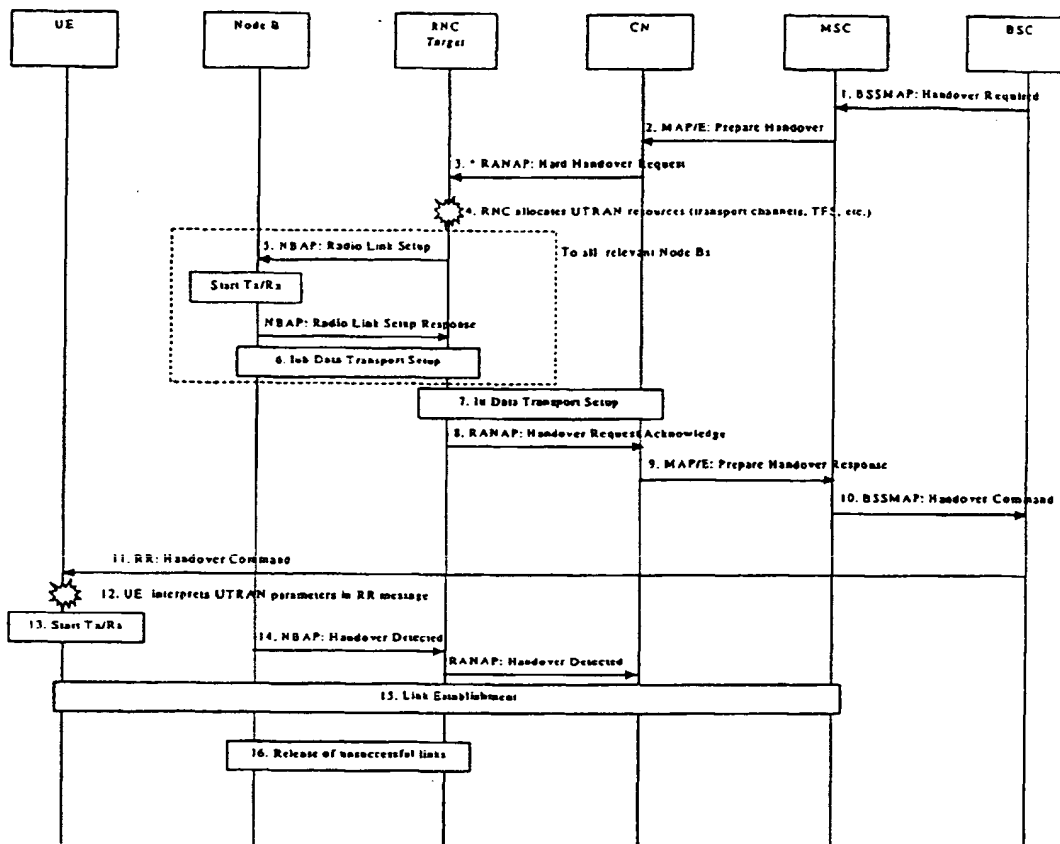


Figure 1


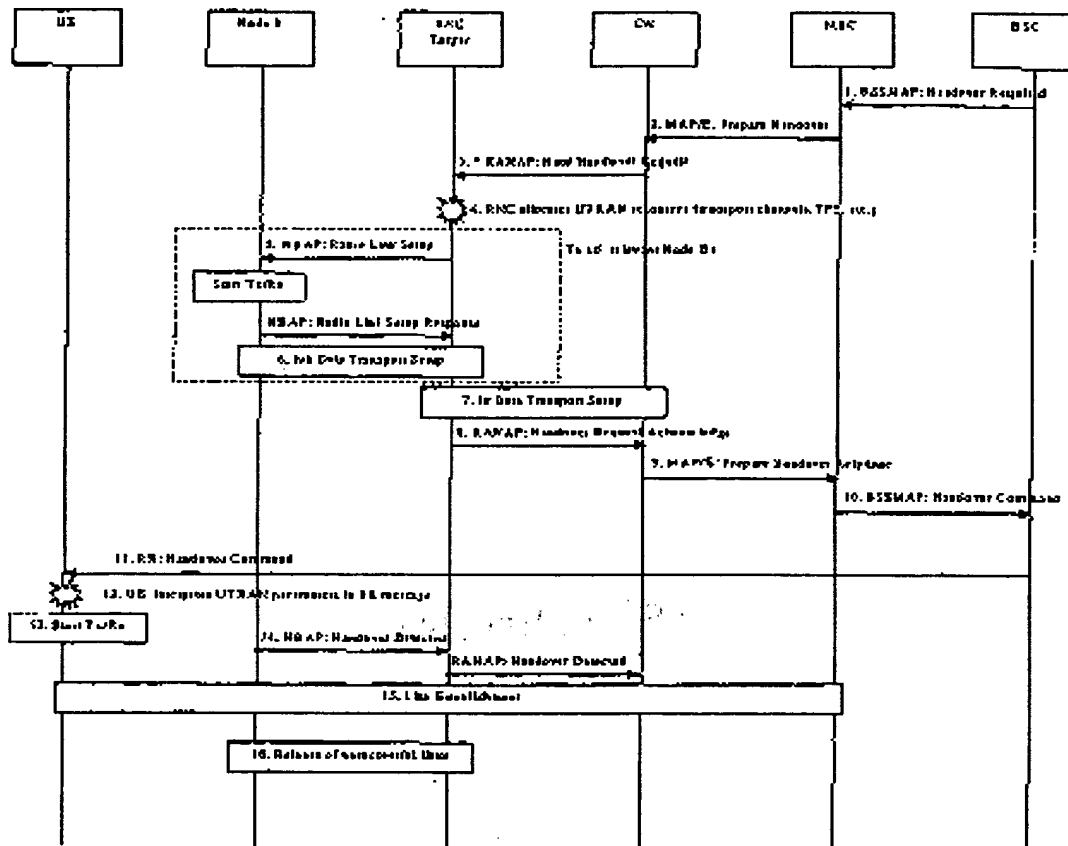


Figure 1

**THIS PAGE BLANK (USPTO)**



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 1 058 471 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
28.02.2001 Bulletin 2001/09

(51) Int Cl.<sup>7</sup>: H04Q 7/38

(43) Date of publication A2:  
06.12.2000 Bulletin 2000/49

(21) Application number: 00304568.9

(22) Date of filing: 30.05.2000

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• Parmar, Gina, Telecom Modus Limited  
Surrey KT22 7SA (GB)  
• Patterson, Robert, Telecom Modus Limited  
Surrey KT22 7SA (GB)

(30) Priority: 28.05.1999 GB 9912604

(74) Representative: Moir, Michael Christopher et al  
Mathys & Squire  
100 Gray's Inn Road  
London WC1X 8AL (GB)

(54) Mobile telecommunications system

(57) A method of processing a handover request from a base station controller (BSC) of a GSM (Global System for Mobile communication) -type network. The method comprises the steps of passing a handover request with GSM-type parameters from a base station controller (BSC) through a Master Switching Center

(MSC) of the GSM-type network to a UMTS core network (CN) and to a Radio Network Controller (RNC) of the UMTS (Universal Mobile Telecommunications System) network, translating the GSM-type parameters to UTRAN parameters in the Radio Network Controller (RNC), and allocating UTRAN resources in response to the translated parameters.

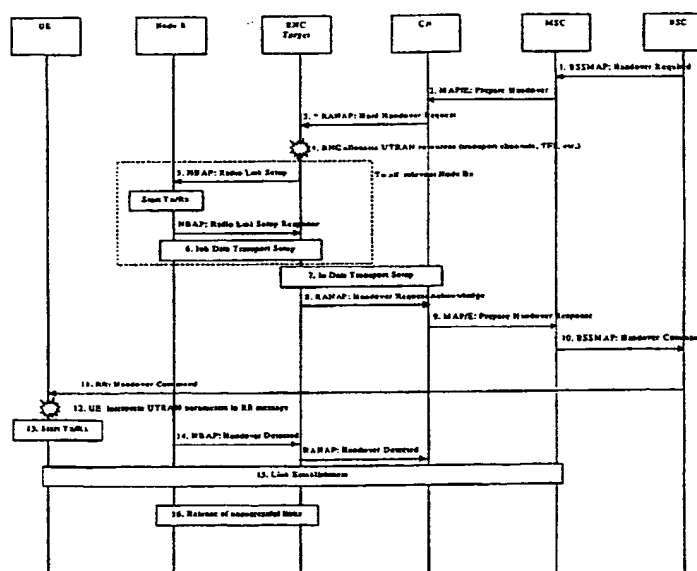


Figure 1

EP 1 058 471 A3



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 00 30 4568

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	WO 97 31503 A (QUALCOMM INC) 28 August 1997 (1997-08-28)  * abstract * * page 1, line 15 - page 3, line 8 * * page 4, line 17 - page 5, line 8 * * figure 1 * ---	1-3, 7-11, 16-19, 22-25	H04Q7/38
A	EP 0 676 907 A (MOTOROLA INC) 11 October 1995 (1995-10-11)  * abstract * * column 1, line 10 - line 16 * * column 2, line 3 - line 18 * * column 4, line 41 - column 6, line 4 * * figure 1 * ---	1-3, 7-11, 17-19, 22-25	
A	WO 98 06226 A (ERICSSON TELEFON AB L M) 12 February 1998 (1998-02-12)  * abstract * * page 1, line 26 - page 5, line 26 * * figure 1 * ---	1,7-11, 17-19, 22-25	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04Q
A	US 5 594 718 A (GILHOUSEN KLEIN S ET AL) 14 January 1997 (1997-01-14) * abstract * * column 2, line 64 - column 3, line 48 * * figure 2 * --- -/--	1,17-19	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 15 December 2000	Examiner Rabe, M
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document I : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1003 03 82 (P04C31)



European Patent  
Office

Application Number  
EP 00 30 4568

**CLAIMS INCURRING FEES**

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

**LACK OF UNITY OF INVENTION**

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 00 30 4568

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 898 438 A (NOKIA MOBILE PHONES LTD) 24 February 1999 (1999-02-24)	13,20	
Y	* abstract *	16,18	
A	* column 1, line 34 - column 4, line 8 *	4-12,14, 15,21, 24,25	
	* column 5, line 7 - line 8 *		
	* figures 1,6 *		
Y	WO 97 41698 A (QUALCOMM INC) 6 November 1997 (1997-11-06)	16,18	
A	* abstract *	4-6,9-11	
	* page 6, line 11 - line 29 *		
	* page 9, line 29 - page 11, line 18 *		
	* figures 1-3 *		
P,X	WO 99 59364 A (BERGENWALL MARTIN ;NOKIA NETWORKS OY (FI); IMMONEN JUKKA (FI); OHV) 18 November 1999 (1999-11-18)	20,21	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
	* page 1, line 14 - page 3, line 14 *		
	* page 11, line 29 - page 13, line 36 *		
	* figures 1,2 *		
A	US 5 857 153 A (LUPIEN FRANCIS) 5 January 1999 (1999-01-05)	12,14, 15,18	
	* abstract *		
	* column 4, line 60 - column 6, line 61 *		
	* figure 1 *		
A	EP 0 615 391 A (BELL TELEPHONE MFG ;ALCATEL NV (NL)) 14 September 1994 (1994-09-14)	13-15,18	
	* column 7, line 22 - line 45 *		
	* figure 1 *		
---			
-/--			
The present search report has been drawn up for all claims			
Place of search <b>MUNICH</b>		Date of completion of the search <b>15 December 2000</b>	Examiner <b>Rabe, M</b>
<b>CATEGORY OF CITED DOCUMENTS</b> X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03 82 (P04C01)





European Patent  
Office

LACK OF UNITY OF INVENTION  
SHEET B

Application Number  
EP 00 30 4568

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims: 1-3, 5, 6, 9-11, 17-19

Method of processing a handover request from a BSC of a GSM-type network, the request including GSM-type parameters and being passed to a UMTS core network and to a RNC of the UMTS network which translates the GSM-type parameters to UTRAN parameters; corresponding RNC

2. Claims: 4-6, 9-11, 18

Method of establishing UMTS communication with User Equipment following receipt by a RNC of a GSM-type handover request, comprising, in the RNC, setting up a radio link to a Node B and setting up data transport between the RNC and the Core Network following acknowledgement of said setup; corresponding RNC

3. Claims: 7-11, 18, 24, 25

Method of establishing UMTS communication between UE and a UMTS network, wherein UTRAN parameter information is forwarded to the UE via a GSM-type network; in the UE, this information is interpreted and communication is initiated with the UMTS network; corresponding RNC, UE and message

4. Claims: 12, 14, 15, 18

Method of performing soft handover from a GSM-type network to a UMTS network including supplying a list of potential access points to the UE, and deleting from said list access points with which satisfactory communication is not possible; corresponding RNC

5. Claims: 13-15, 18

Method of switching from a GSM-type network to a UMTS network, including switching directly from a GSM-type communication mode to a UMTS diversity mode; corresponding RNC

6. Claims: 16, 18

Method of communicating between UE and GSM-type and UMTS networks, comprising communicating information simultaneously or quasi-simultaneously via both networks during handover from one network to the other; corresponding



European Patent  
Office

LACK OF UNITY OF INVENTION  
SHEET B

Application Number

EP 00 30 4568

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

RNC

7. Claims: 20, 21

Radio Network Controller (RNC) of a UMTS network including means for performing radio link setup in response to a request from a GSM network to handover a call

8. Claims: 22-23

Radio Network Controller of a UMTS network, including means for sending UTRAN parameters to UE via a GSM network to enable the UE to establish UMTS communications to transfer a call from the GSM network to the UMTS network



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 00 30 4568

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	WO 99 20071 A (ERICSSON TELEFON AB L M) 22 April 1999 (1999-04-22) * abstract * * page 1, line 10 - page 3, line 4 * * page 5, line 27 - page 6, line 27 * * figures 1,2 * -----	20-23	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search <b>MUNICH</b>		Date of completion of the search <b>15 December 2000</b>	Examiner <b>Rabe, M</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03 82 (PC4C01)

ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.

EP 00 30 4568

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-12-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9731503 A	28-08-1997	US 5978679 A	02-11-1999
		AU 723264 B	24-08-2000
		AU 1706197 A	10-09-1997
		BR 9708429 A	03-08-1999
		CA 2247190 A	28-08-1997
		CN 1214844 A	21-04-1999
		EP 0882378 A	09-12-1998
		FI 981778 A	23-10-1998
		JP 2000505261 T	25-04-2000
		NO 983879 A	21-10-1998
		NZ 331441 A	28-01-1999
EP 0676907 A	11-10-1995	GB 2288301 A	11-10-1995
		GB 2321165 A	15-07-1998
WO 9806226 A	12-02-1998	US 5857153 A	05-01-1999
		AU 3790097 A	25-02-1998
US 5594718 A	14-01-1997	AU 697734 B	15-10-1998
		AU 5432396 A	16-10-1996
		BR 9607948 A	14-07-1998
		CA 2216635 A	03-10-1996
		EP 0818117 A	14-01-1998
		WO 9631078 A	03-10-1996
EP 0898438 A	24-02-1999	FI 973425 A	21-02-1999
		AU 7045198 A	08-03-1999
		BR 9811247 A	18-07-2000
		CN 1267440 T	20-09-2000
		FI 990988 A	30-04-1999
		WO 9909774 A	25-02-1999
		JP 11113071 A	23-04-1999
WO 9741698 A	06-11-1997	US 5940762 A	17-08-1999
		AU 2823597 A	19-11-1997
		CA 2253379 A	06-11-1997
		EP 0896778 A	17-02-1999
		JP 2000509583 T	25-07-2000
WO 9959364 A	18-11-1999	FI 981041 A	12-11-1999
		FI 981407 A	12-11-1999
		AU 4042399 A	29-11-1999
US 5857153 A	05-01-1999	US 5761623 A	02-06-1998
		AU 3790097 A	25-02-1998
		WO 9806226 A	12-02-1998

EPO FORM P459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.

EP 00 30 4568

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15-12-2000

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5857153	A		AU 7350496 A	30-04-1997
			BR 9610979 A	02-03-1999
			CA 2234697 A	17-04-1997
			WO 9714263 A	17-04-1997
EP 0615391	A	14-09-1994	AU 667763 B	04-04-1996
			AU 5514594 A	15-09-1994
			CA 2118559 A	10-09-1994
			CN 1099545 A	01-03-1995
			FI 941093 A	10-09-1994
			JP 6350520 A	22-12-1994
			US 5504935 A	02-04-1996
WO 9920071	A	22-04-1999	SE 513935 C	27-11-2000
			AU 9468798 A	03-05-1999
			SE 9703697 A	11-04-1999

THIS PAGE BLANK (25/10)

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**THIS PAGE BLANK (USPTO)**